

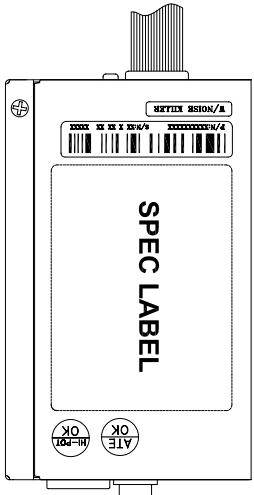
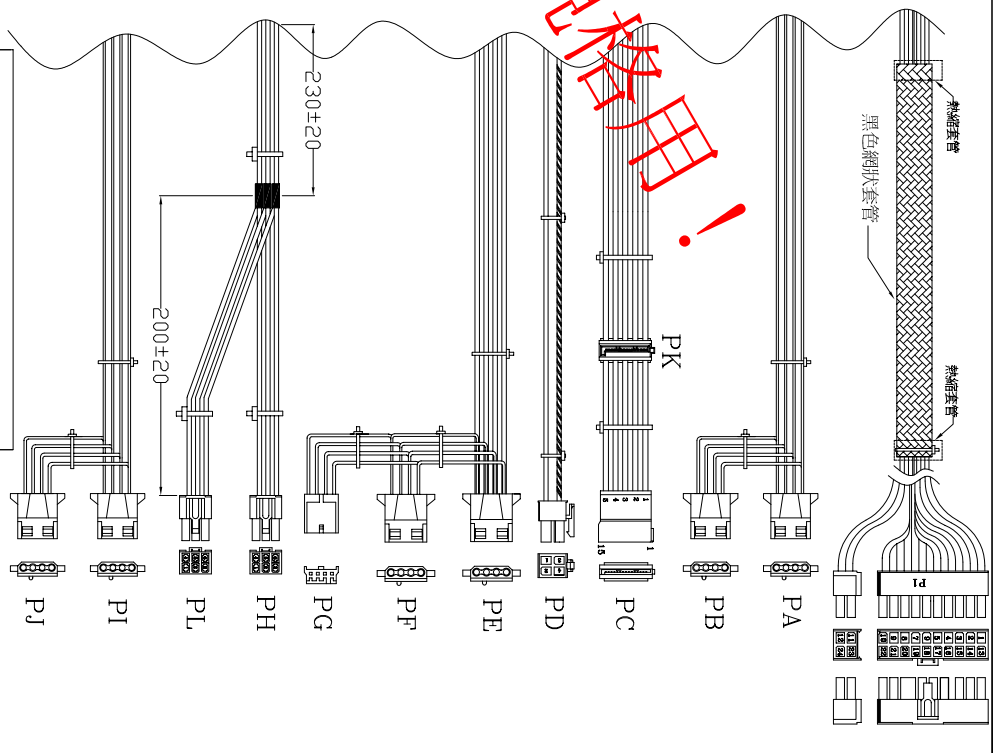


| REF. ID | NO. | SIGNAL | COLOR | VOLTAGE | CONNECTOR TYPE | CABLE LENGTH |
|---------|-----|---------|--------|---------|-------------------------|--------------|
| P1 | 1 | +3.3VDC | ORANGE | 1.8 | JMT | 550+30mm |
| | 2 | +3.3VDC | ORANGE | 1.8 | JP2416V2-20S/4S or RQV. | -10 |
| | 3 | COM | BLACK | 1.8 | | |
| | 4 | COM | BLACK | 1.8 | | |
| | 5 | COM | BLACK | 1.8 | | |
| P1 | 6 | +5VDC | RED | 1.8 | | |
| | 7 | COM | BLACK | 1.8 | | |
| | 8 | PW-OK | GRAY | 2.4 | | |
| | 9 | +5Vdc | PURPLE | 1.8 | | |
| | 10 | +15VDC | YELLOW | 1.8 | | |
| | 11 | +5VDC | YELLOW | 1.8 | | |
| | 12 | +3.3VDC | ORANGE | 1.8 | | |
| | 13 | +3.3VDC | ORANGE | 2.0 | | |
| | 14 | FRANK | BROWN | 2.4 | | |
| | 15 | -15VDC | BLUE | 2.4 | | |
| P1 | 16 | COM | BLACK | 1.8 | | |
| | 17 | PS-ON | GREEN | 2.4 | | |
| | 18 | COM | BLACK | 1.8 | | |
| | 19 | COM | BLACK | 1.8 | | |
| | 20 | COM | BLACK | 1.8 | | |
| | 21 | +5VDC | RED | 1.8 | | |
| | 22 | +5VDC | RED | 1.8 | | |
| | 23 | +5VDC | RED | 1.8 | | |
| | 24 | COM | BLACK | 1.8 | | |
| | 25 | +12V | YELLOW | 1.8 | | |
| PA | 1 | COM | BLACK | 1.8 | AMP | 430+30mm |
| | 2 | COM | BLACK | 1.8 | -480424-0 | 430+30mm |
| | 3 | COM | BLACK | 1.8 | -480424-0 | 430+30mm |
| | 4 | +5V | RED | 1.8 | | |
| | 5 | +5V | RED | 1.8 | | |
| PB | 1 | +5V | RED | 1.8 | AMP | 430+30mm |
| | 2 | +5V | RED | 1.8 | -480424-0 | 430+30mm |
| | 3 | COM | BLACK | 1.8 | or RQV. | |
| | 4 | +5V | RED | 1.8 | or RQV. | |
| PJ | 1 | +12V | YELLOW | 1.8 | AMP | 150+10mm |
| | 2 | COM | BLACK | 1.8 | 18PIN | |
| | 3 | COM | BLACK | 1.8 | SERREL, AVA | |
| | 4 | +5V | RED | 1.8 | | |
| PC | 1 | COM | BLACK | 1.8 | NOTEX | |
| | 2 | COM | BLACK | 1.8 | | |
| | 3 | COM | BLACK | 1.8 | | |
| | 4 | COM | BLACK | 1.8 | | |
| | 5 | +3.3VDC | ORANGE | 1.8 | | |
| PD | 1 | COM | BLACK | 1.8 | AMP | 95-01-3040 |
| | 2 | +12V | YELLOW | 1.8 | or RQV. | |
| | 3 | +12V | YELLOW | 1.8 | | |
| | 4 | +12V | YELLOW | 1.8 | | |
| PE | 1 | COM | BLACK | 1.8 | AMP | 430+30mm |
| | 2 | COM | BLACK | 1.8 | -480424-0 | 430+30mm |
| | 3 | COM | BLACK | 1.8 | or RQV. | |
| | 4 | +5V | RED | 1.8 | or RQV. | |
| PF | 1 | +12V | YELLOW | 1.8 | AMP | 171522-4 |
| | 2 | COM | BLACK | 1.8 | 171522-4 | |
| | 3 | COM | BLACK | 1.8 | or RQV. | |
| | 4 | +5V | RED | 1.8 | or RQV. | |
| PG | 1 | +12V | YELLOW | 2.2 | AMP | 250+10mm |
| | 2 | COM | BLACK | 2.2 | | |
| | 3 | COM | BLACK | 2.2 | | |
| | 4 | +12V | YELLOW | 1.8 | | |
| PH | 1 | +12V | YELLOW | 1.8 | C4202100 | 430+30mm |
| | 2 | COM | BLACK | 1.8 | -RP | |
| | 3 | +12V | YELLOW | 1.8 | | |
| | 4 | COM | BLACK | 1.8 | | |
| PI | 1 | COM | BLACK | 1.8 | AMP | 430+30mm |
| | 2 | COM | BLACK | 1.8 | -480424-0 | 430+30mm |
| | 3 | COM | BLACK | 1.8 | or RQV. | |
| | 4 | +5V | RED | 1.8 | or RQV. | |
| PK | 1 | +12V | YELLOW | 1.8 | AMP | 150+10mm |
| | 2 | COM | BLACK | 1.8 | PS-11202204 | 100+30mm |
| | 3 | COM | BLACK | 1.8 | or RQV. | |
| | 4 | +3.3VDC | ORANGE | 1.8 | | |

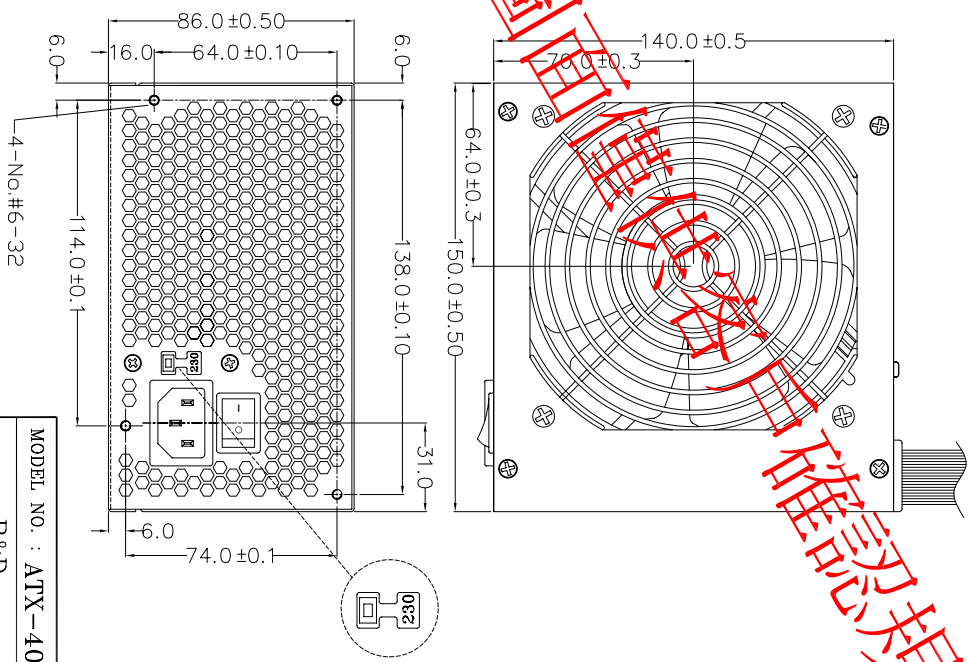

新用圖面
 權恐規格用!

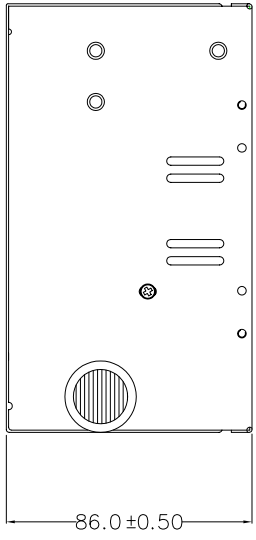

P/N: SA0306-C

NOTE:
 1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.

UNIT:mm

| | | | |
|-----------------------------|-------------|---------------|-------------|
| MODEL NO. : ATX-400PN(S201) | TITLE: ASSY | SHEET: 1 OF 1 | REV:01 |
| R&D | PE | DRAWN | DATE |
| INTERIOR COUNTERSIGN: | | | JUL.20.2005 |